
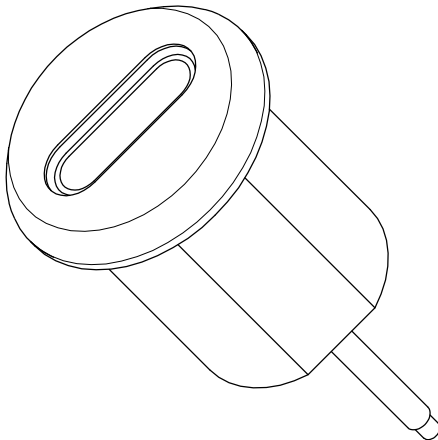
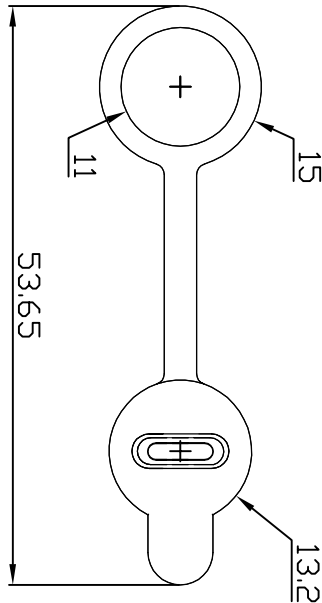
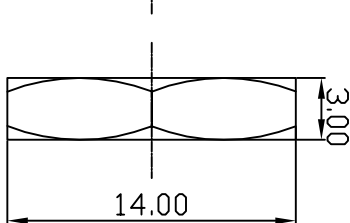
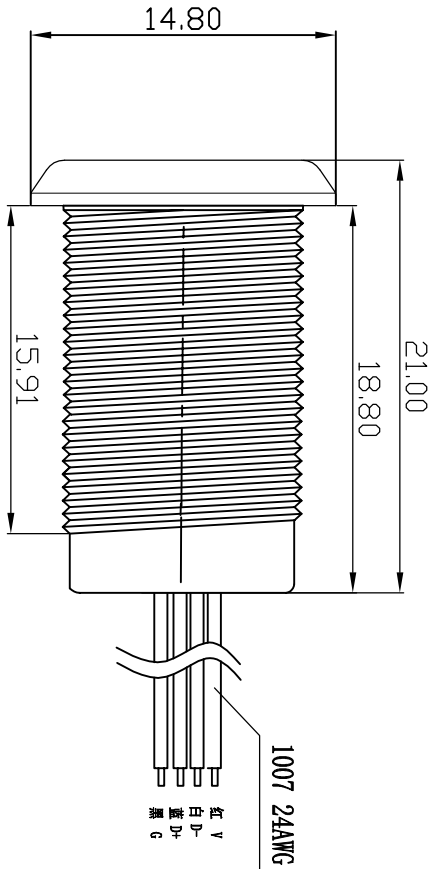
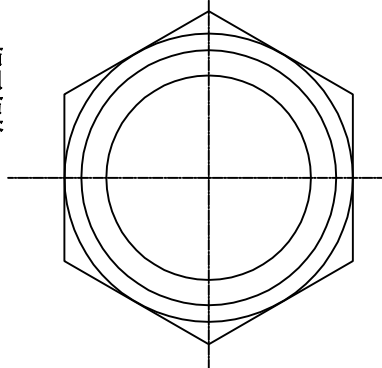



RoHS

客户图

REV.	ECN	DESCRIPTION	MOD'D	DATE
A0	—	新订图面	Lee	2020.03.18



螺牙规格: M12*1.0*14*3.0

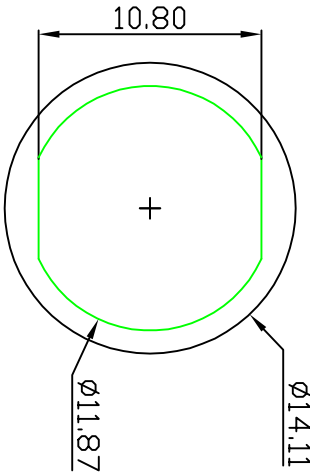

机板开孔尺寸

料号: CHT-TS023X-HXXX-PX
“TS”表示TYPEC
“015”立插系列
“R”= (袋装)
“H”表示高度
表示尺寸
表示PIN数

- SPECIFICATION
1. Rating: 4.2V 1.2A;
 2. Contact resistance: $\leq 0.03\Omega$;
 3. Insulation resistance: $\geq 100M\Omega$ (DC250V)
 4. Withstand voltage: 500VAC;
 5. Insertion and extraction force: 5-20N
 6. Life test: 10000 cycles;

创益讯电子（深圳）有限公司 Chuangyixun Electronics (Shenzhen) Co., Ltd		页码 (SHEET):	1/1	比例 (SCALE):	1:1
品名 (ITEM NO):	TPC 4P 焊线带外螺牙 (带灯)	单位 (UNIT):	mm	公差表 TOLERANCE IN SPECIFIED .0-1.30 .0° ±10° .001-0.20 .0° ±8° .001-1.10 .0° ±5°	
图号 (DWG NO):	CHT-TS023R-H210-P4	设计 (DESIGN):	LKH		
		审核 (CHECKED):	TYJ		
		核准 (APPROVEE):	LZB		

These drawings and specifications are owned by CHUANGYIXUN Electronics (Shenzhen) Co., LTD., and shall not be copied. It may not be reproduced or used in any way without the prior written consent of our company.