




RoHS

客户图

REV.	ECN	DESCRIPTION	MDP'D	DATE
A0	—	新订图面	Lee	2020.03.18

备注:



1. 电气测试:
1.1 接触电阻: 30mΩ MAX,
寿命后变化±10mΩ
1.2 耐电压: 100V AC
1.3 绝缘电阻: 1000MΩ MIN
1.4 额定电流 5A
2. 机械测试
2.1 耐久测试: 10000次;
2.2 插入力: 20N Max;
2.3 拔出力: 8N Min;
3. 包装:
3.1 PE袋包装, 最小包装量1000PCS
4. 环境
4.1 工作温度: -55℃~+88℃

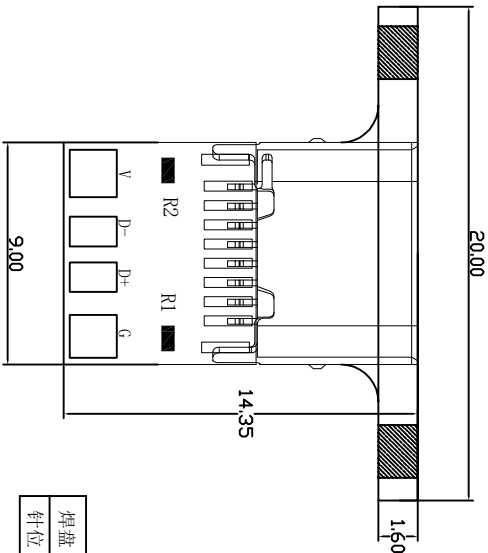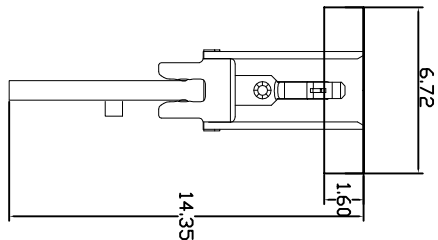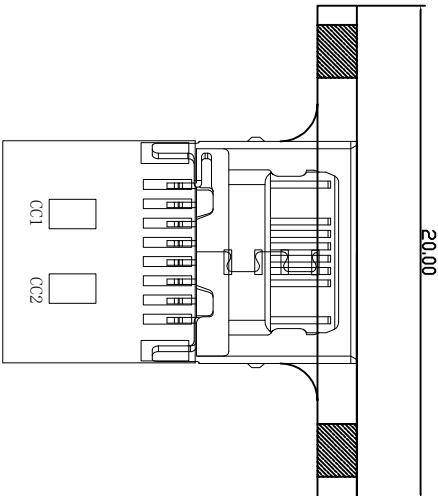

焊盘	CC1	CC2	
针位	A5	B5	

焊盘	V	D-	D+	G
针位	A4 A9 B4 B9	A7 B7	A6 B6	A1 A12 B1 B12
备注	R1:G+AB/5, 1KΩ 下拉 (0402)		R2:G+BB/5, 1KΩ 下拉 (0402)	

接点定义放大图 (16P)

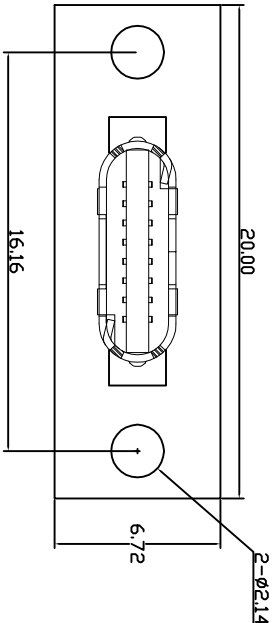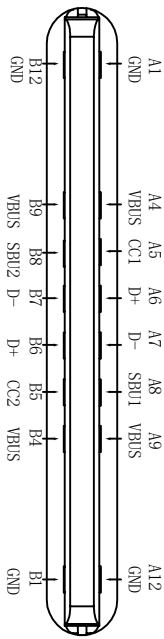

创益讯电子 (深圳) 有限公司		页码 (SHEET)	1/1	比例 (SCALE) 1:1
Chuangyixun Electronics (Shenzhen) Co., Ltd		单位 (UNIT):	mm	未注公差 TOLERANCE UNLESS NOTED
品名 (ITEM NO)	TYPE-C6P 固定板母插座 6芯双5.1KΩ电阻	设计 (DESIGN)	LKH	0±0.30 0~±10°
图号 (DWG NO)	CYX-H141P6B	审核 (CHECKED)	TYJ	00±0.20 0~±8°
		核准 (APPROVED)		0.00±0.10 0.00±5°

These drawings and specifications are owned by CHUANGYIXUN Electronics (Shenzhen) Co., LTD., and shall not be copied. It may not be reproduced or used in any way without the prior written consent of our company.