
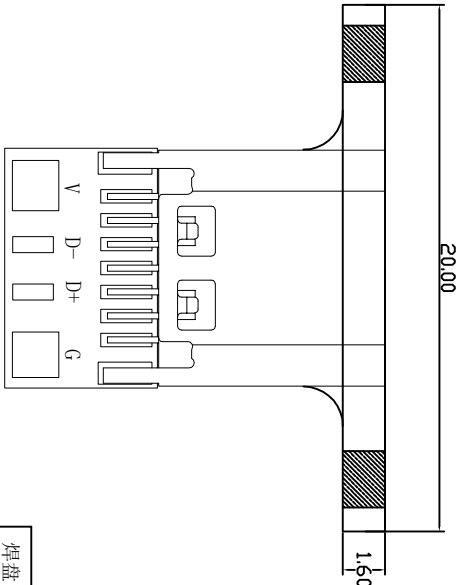




RoHS 客户图

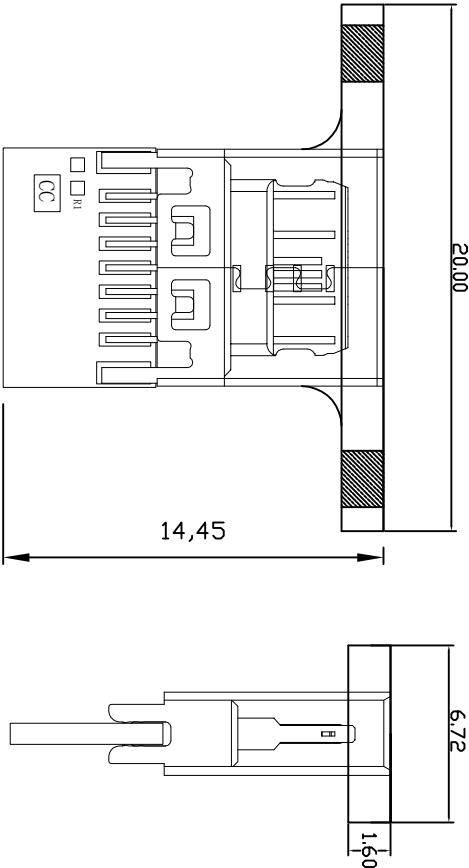

- 备注:
1. 电气测试:
 - 1.1 接触电阻: 30mΩ MAX, 寿命后变化±10mΩ
 - 1.2 耐电压: 100V AC
 - 1.3 绝缘阻抗: 1000MΩ MIN
 - 1.4 额定电流 5A
 2. 机械测试
 - 2.1 耐久测试: 10000次;
 - 2.2 插入力: 20N Max;
 - 2.3 拔出力: 8N Min;
 3. 包装:
 - 3.1 PE袋包装, 最小包装量1000PCS
 4. 环境:
 - 4.1 工作温度: -55℃~+88℃

焊盘	CC1	CC2		
针位	A5	B5		
焊盘	V	D-	D+	G
针位	A4 A9 B4 B9	A7 B7	A6 B6	A1 A12 B1 B12
备注	R1:G+A5/5, 1KΩ 下投 (0402) R2:G+B5/5, 1KΩ 下投 (0402)			

接点定义放大图(16P)

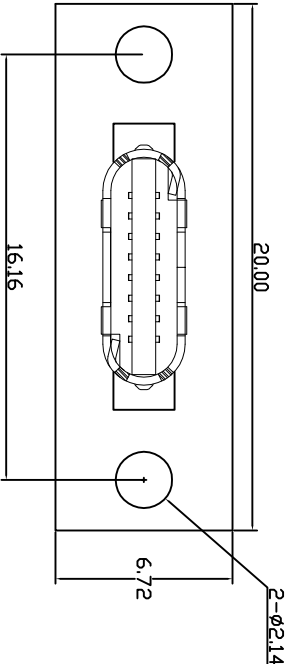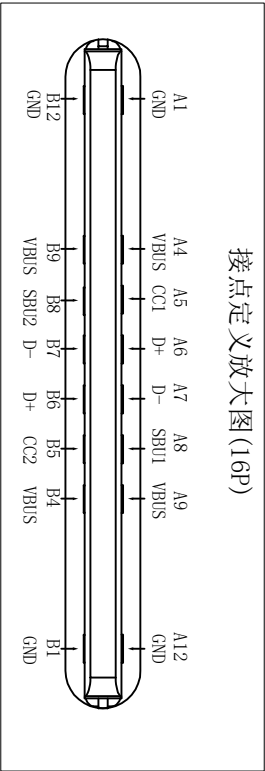

REV.	ECN	DESCRIPTION	MDF'D	DATE
A0		新订图面	Lee	2020.03.18

创益讯电子（深圳）有限公司		页码 (SHEET)	1/1	比例 (SCALE) 1:1
Chuangyixun Electronics (Shenzhen) Co., Ltd		单位 (UNIT):	mm	未注公差
品名 (ITEM NO)	TYPE-C5P带固定板母座 (不带电阻)	设计 (DESIGN)	LKH	POLENCE UNSPECIFIED
图号 (DWG NO)	CYX-H145P5B	审核 (CHECKED)	TYJ	.0-±0.30 0.±10°.00±0.20 .0±.8°.000±0.10 .00±.5°
		核准 (APPROVED)		

These drawings and specifications are owned by CHUANGYIXUN Electronics (Shenzhen) Co., LTD., and shall not be copied. It may not be reproduced or used in any way without the prior written consent of our company .