

RoHS 客户图




REV.	ECN	DESCRIPTION	MDP'D	DATE
A0	——	新订图面	Lee	2020.03.18

Electrical Specifications:

- 1. Current Rating 15A/contact terminal
- 2. Voltage Rating 30V AC
- 3. Contact Resistance 30 milliohms MAX
- 4. Dielectric Withstanding Voltage: 500 V AC AT Sea Level
- 5. Insulation Resistance: 1000MEGA ohms MIN

Mechanical:

- 1. Connector Mate and Unmate Force Mate Force: 3.57kgf(40N) Unmate Force: 1.02kgf(10N)
- 2. Terminal Retention 1.0kgf(10N)
- 3. Housing: Hing Temperature Thermoplastics,
- 4. Material: 1. Shell: Copper Alloy C2680/SPCC 2. Contact: Plated Gold in Mating Area; Tin On Solder Tails
- 5. Shell: 0.5mm(0.020") 2. Shell: 0.3mm(0.012") Nickel Plating

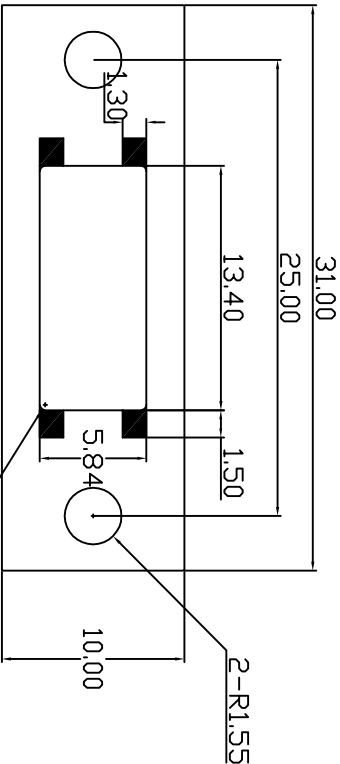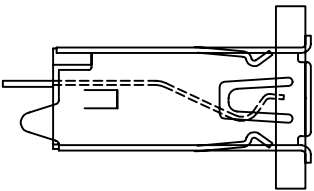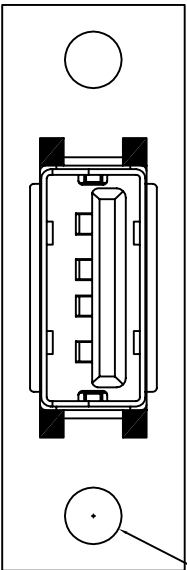

创益讯电子（深圳）有限公司		页码 (SHEET)	1/1	比例 (SCALE) 1:1
Chuangyixun Electronics (Shenzhen) Co., Ltd		单位 (UNIT) :	mm	未注公差
品名 (ITEM NO)	USB 4p 带固定板母座 (蓝板)	设计 (DESIGN)	LKH	TOLERANCE UNPREFIRED
图号 (DWG NO)	CYX-H150P4W	审核 (CHECKED)	TYJ	0.±0.30 0.±1.10 0.0±0.20 0.±8. 0.00±0.10 0.00±5
		核准 (APPROVED)		

These drawings and specifications are owned by CHUANGYIXUN Electronics (Shenzhen) Co., LTD., and shall not be copied. It may not be reproduced or used in any way without the prior written consent of our company .